

SURFACE MOUNTED LIGHTS

PANEL LIGHT 60-4

|                                                                                   |                                                                               |                                                |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------|
|  | <div>WATTAGE</div> <div>2.64 Watt</div>                                       | <div>INPUT VOLTAGE</div> <div>12 Volt DC</div> |
|                                                                                   | <div>CORRELATED COLOUR TEMPERATURE</div> <div>3000 / 4000 / 6000 Kelvin</div> |                                                |
|                                                                                   |                                                                               |                                                |

TECHNICAL DATA


|                                                                     |                                                                                                                |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Input voltage                                                       | 12 Volt DC                                                                                                     |
| Wattage                                                             | 2.64 Watt                                                                                                      |
| Type                                                                | 2000 mm mains lead with LED plug                                                                               |
| Dimensions                                                          | 600 x 60 x 4 mm                                                                                                |
| Housing colour                                                      | silver / white                                                                                                 |
| Installation                                                        | double adhesive tape                                                                                           |
| Remarks                                                             | very flat construction, only 4 mm high, variable length, homogeneously distributed light, without glare effect |
| Correlated colour temperature and luminous flux of the light source | 3000K   198 Lumen<br>4000K   209 Lumen<br>6000K   209 Lumen                                                    |
| Lumen maintenance factor                                            | L70B50 >36000 h                                                                                                |
| CRI                                                                 | 90                                                                                                             |
| EEC                                                                 | G                                                                                                              |
| Waste disposal                                                      | through suitable disposal site                                                                                 |
| Replaceability                                                      | the light source is not replaceable                                                                            |

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

| ORDER NO.    | LIGHT COLOUR      |                       |
|--------------|-------------------|-----------------------|
| 32.871.016ww | <div></div> 3000K | warm white · 198 lm   |
| 32.871.016nw | <div></div> 4000K | nature white · 209 lm |
| 32.871.016cw | <div></div> 6000K | cold white · 209 lm   |

DIMENSIONAL DRAWING

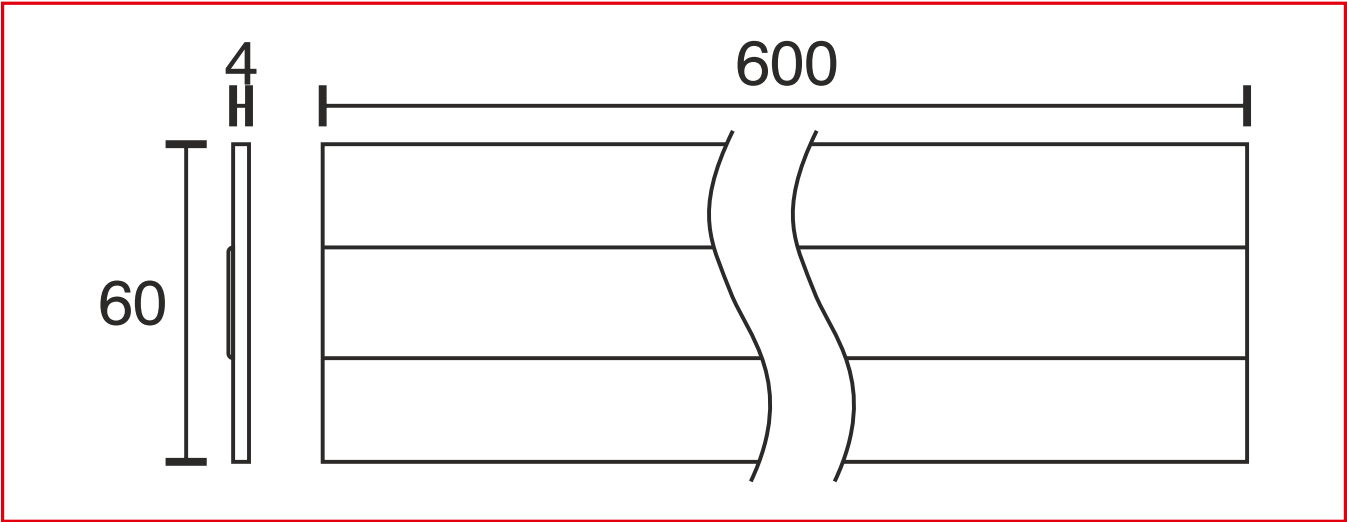

600 x 60 x 4 mm