

LUMINAIRES

CABINET LIGHTS

Product catalogue

The Cabinet Lights are suitable for the use on bathroom furniture, as well as on cabinets and displays. They provide a practical solution to illuminate the furniture or the presented goods and are easy to install. Either in the form of panel lights or filigree profiles available in almost every required length, our product range will provide a large variety of solutions.

CONTENTS

10 PRODUCTS

01	Cabinet Light Toros, with CCT colour changing	33.019.006
02	Cabinet light with CCT colour changing	32.948.000
03	Curve light	32.943.000www
04	Mirror light Tube	32.934.004nw
05	Cabinet Light PED	32.815.003cw
06	Cabinet Light Q1 B	32.816.101www
07	Cabinet Light Q1	32.806.106www
08	Mounted Light Fixture ALH Light Profile	32.746.074www
09	Cabinet Light ALH1	32.510.176www
10	Cabinet Light ALH2	32.510.276www

CABINET LIGHTS

CABINET LIGHT TOROS, WITH CCT COLOUR CHANGING

	WATTAGE 2 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 - 6800 Kelvin	

TECHNICAL DATA

Input voltage	12 Volt DC
Wattage	2 Watt
Type	2000 mm mains lead with LED plug
Dimensions	300 x 95 x 40 mm
Housing colour	silver
Installation	screw mounting at the top side
Remarks	with CCT colour changing, separate controller required
Correlated colour temperature and luminous flux of the light source	3000K - 6800K 155 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

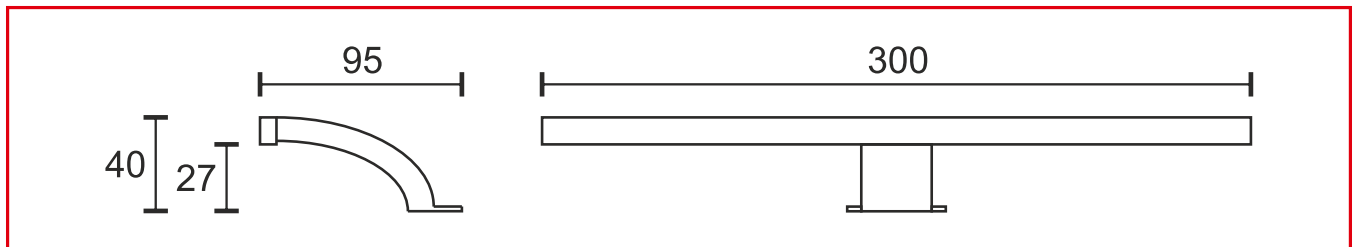
VARIANTS

ORDER NO.

HOUSING COLOUR

33.019.006 silver

DIMENSIONAL DRAWING

**300 x 95 x 40 mm**

CABINET LIGHTS

CABINET LIGHT WITH CCT COLOUR CHANGING

	WATTAGE	INPUT VOLTAGE
	3 Watt	12 Volt DC
	CORRELATED COLOUR TEMPERATURE	
	3000 - 6800 Kelvin	

TECHNICAL DATA

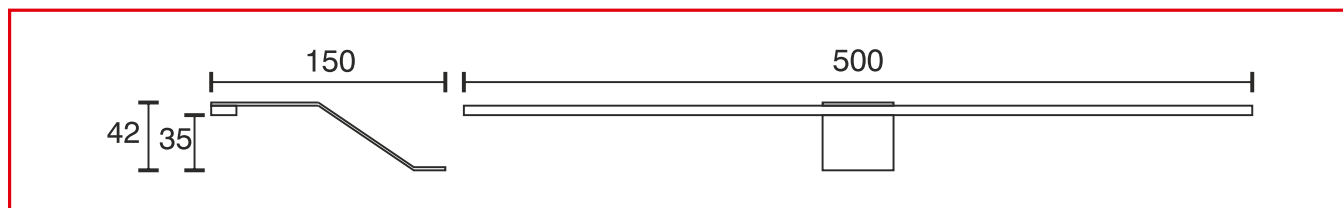
Input voltage	12 Volt DC
Wattage	3 Watt
Type	2000 mm mains lead with LED plug
Dimensions	500 x 150 x 42 mm
Housing colour	silver
Installation	screw mounting at the top side
Remarks	with CCT colour changing, separate controller required, for example Remote control CCT
Correlated colour temperature and luminous flux of the light source	3000K - 6800K 261 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	83
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
32.948.000	 silver

DIMENSIONAL DRAWING

**500 x 150 x 42 mm**

CABINET LIGHTS

CURVE LIGHT

	WATTAGE 6.6 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3700 / 5000 Kelvin	

TECHNICAL DATA

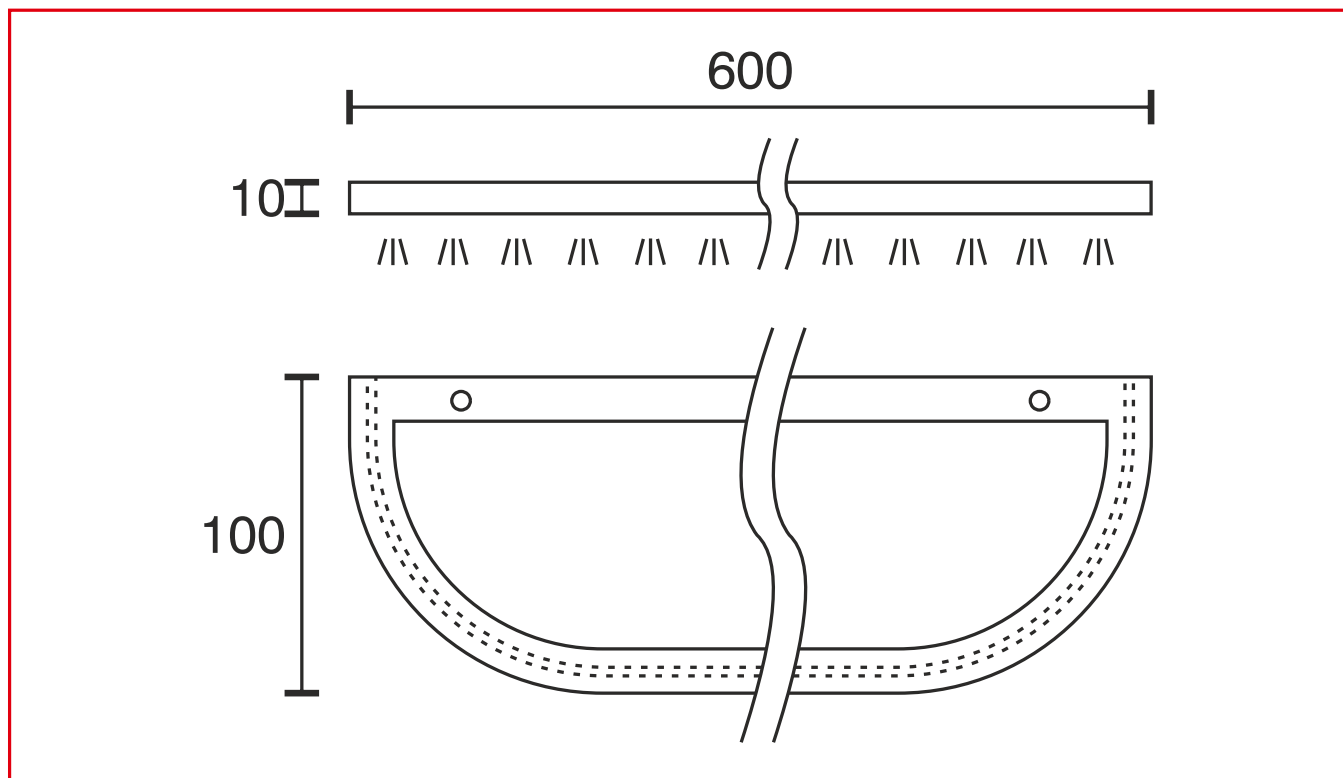
Input voltage	12 Volt DC
Wattage	6.6 Watt
Type	2000 mm mains lead with LED plug
Dimensions	600 x 100 x 10 mm
Installation	screw mounting at the top side
Remarks	minimalistic cabinet light for the livingroom, bedroom, kitchen, bathroom
Correlated colour temperature and luminous flux of the light source	3700K 632 Lumen 5000K 646 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	80
EEC	F
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.943.000ww	 3700K	warm white · 632 lm
32.943.000nw	 5000K	nature white · 646 lm

DIMENSIONAL DRAWING

**600 x 100 x 10 mm**

CABINET LIGHTS

MIRROR LIGHT TUBE

	WATTAGE 6 Watt	INPUT VOLTAGE 230 Volt AC
	CORRELATED COLOUR TEMPERATURE 4000 Kelvin	

TECHNICAL DATA

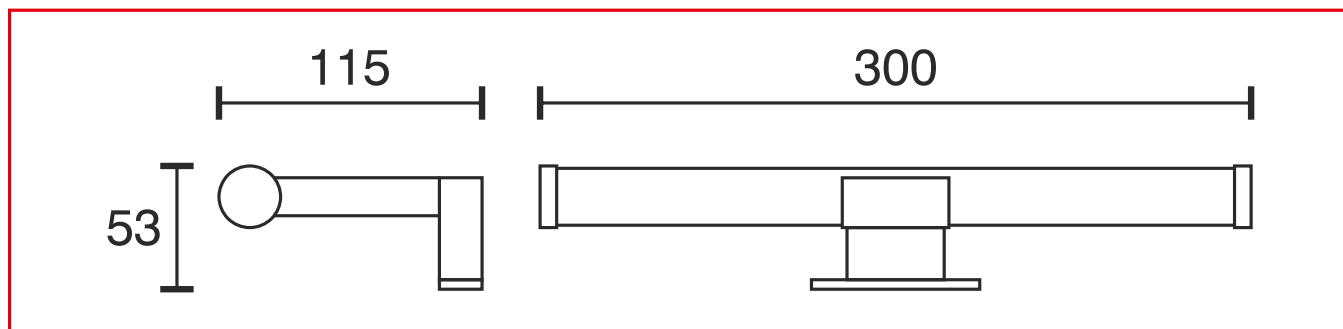
Input voltage	230 Volt AC
Wattage	6 Watt
Type	1000 mm mains lead with wire end ferrule
Dimensions	300 x 115 x 53 mm
Housing colour	chrome
Installation	screw mounting on top of the cabinet or installation onto the mirror with clamp, up to 6 mm thickness
IP Code	IP44
Correlated colour temperature and luminous flux of the light source	4000K 450 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	80
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.934.004nw	 4000K	nature white

DIMENSIONAL DRAWING

**300 x 115 x 53 mm**

CABINET LIGHTS

CABINET LIGHT PED

	WATTAGE 5.52 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 6000 Kelvin	

TECHNICAL DATA

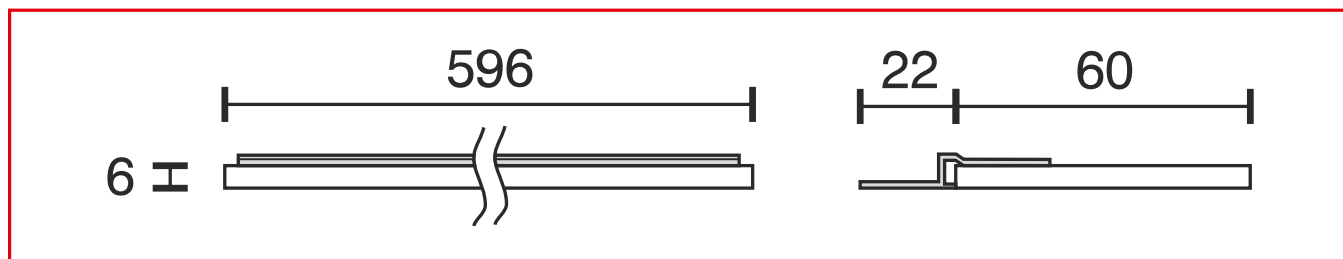
Input voltage	12 Volt DC
Wattage	5.52 Watt
Type	1000 mm mains lead with LED plug
Dimensions	596 x 60 x 6 mm further lengths on request
Housing colour	white / aluminium
Installation	screw mounting at the top side
Correlated colour temperature and luminous flux of the light source	6000K 448 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.815.003cw	 6000K	cold white · 448 lm

DIMENSIONAL DRAWING

**596 x 60 x 6 mm**

CABINET LIGHTS

CABINET LIGHT Q1 B

	WATTAGE 3 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 / 4000 / 6000 Kelvin	

TECHNICAL DATA

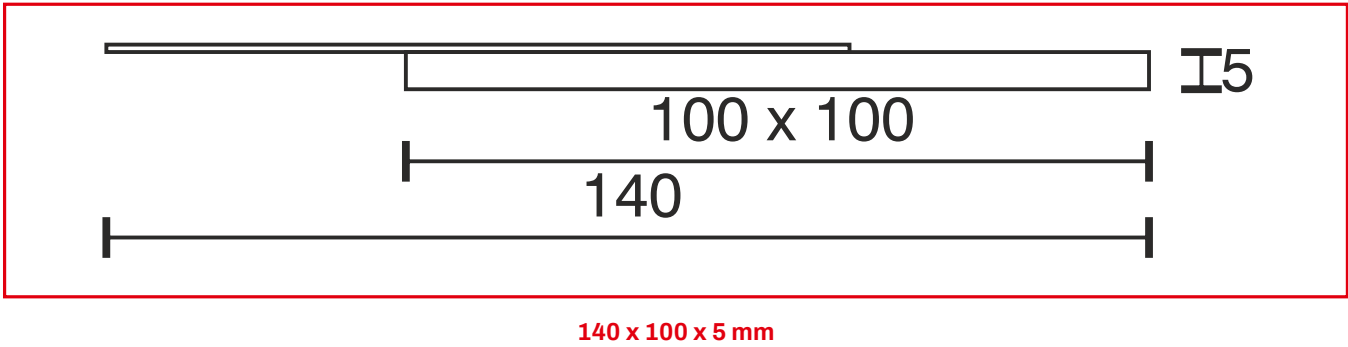
Input voltage	12 Volt DC
Wattage	3 Watt
Type	1900 mm mains lead with LED plug
Dimensions	140 x 100 x 5 mm
Housing colour	white
Installation	screw mounting at the top side
Remarks	homogeneously distributed light, without glare effect
Correlated colour temperature and luminous flux of the light source	3000K 160 Lumen 4000K 170 Lumen 6000K 170 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

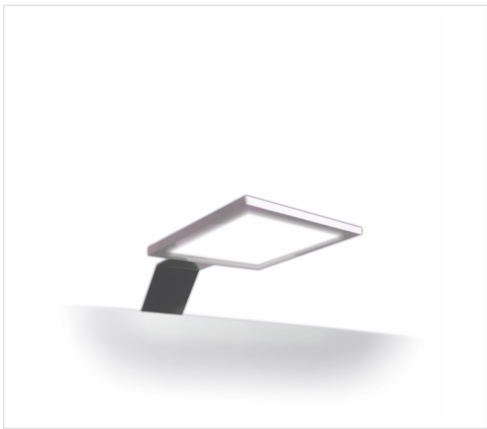
ORDER NO.	LIGHT COLOUR	
32.816.101ww	 3000K	warm white · 160 lm
32.816.101nw	 4000K	nature white · 170 lm
32.816.101cw	 6000K	cold white · 170 lm

DIMENSIONAL DRAWING



CABINET LIGHTS

CABINET LIGHT Q1

	WATTAGE 3 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 / 4000 / 6000 Kelvin	

TECHNICAL DATA

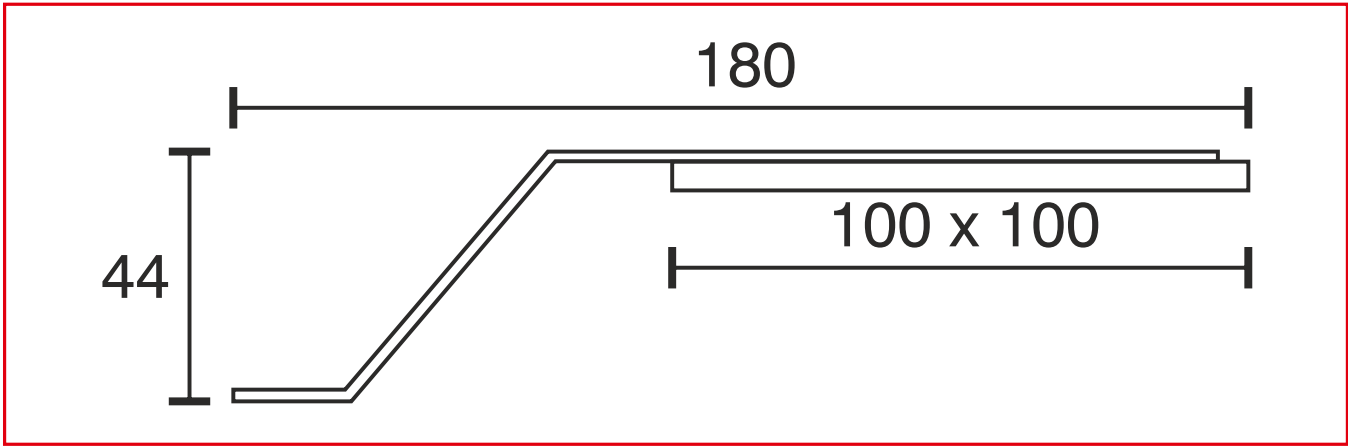
Input voltage	12 Volt DC
Wattage	3 Watt
Type	1900 mm mains lead with LED plug
Dimensions	180 x 100 x 44 mm
Housing colour	white
Installation	screw mounting at the top side
Remarks	homogeneously distributed light, without glare effect
Correlated colour temperature and luminous flux of the light source	3000K 160 Lumen 4000K 170 Lumen 6000K 170 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.806.106ww	 3000K	warm white · 160 lm
32.806.106nw	 4000K	nature white · 170 lm
32.806.106cw	 6000K	cold white · 170 lm


DIMENSIONAL DRAWING



180 x 100 x 44 mm

CABINET LIGHTS

MOUNTED LIGHT FIXTURE ALH LIGHT PROFILE

	WATTAGE 4.32 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 / 4000 / 6000 Kelvin	

TECHNICAL DATA

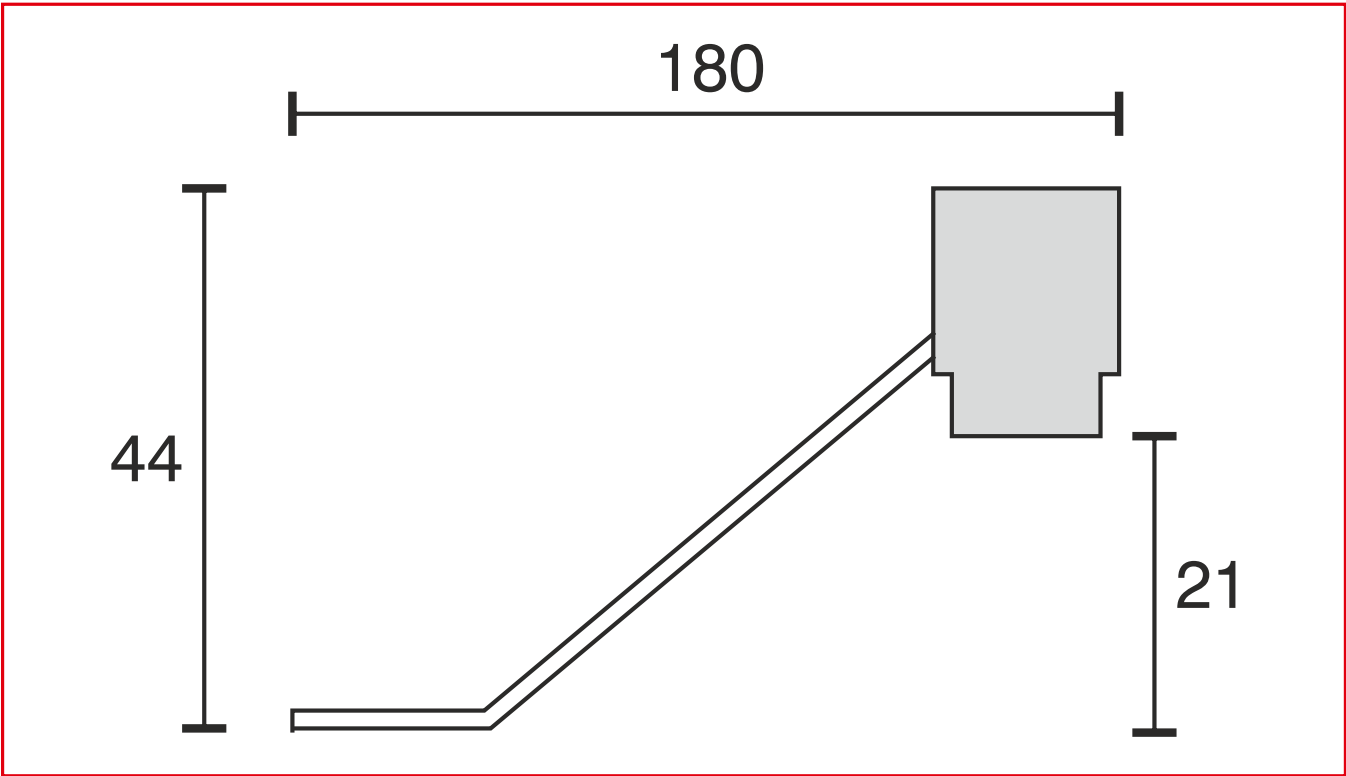
Input voltage	12 Volt DC
Wattage	4.32 Watt
Type	2000 mm mains lead with LED plug
Dimensions	500 x 70 x 47 mm further lengths on request further lengths on request
Housing colour	bright chrome
Installation	screw mounting at the top side
Remarks	homogeneously distributed light
Correlated colour temperature and luminous flux of the light source	3000K 342 Lumen 4000K 351 Lumen 6000K 351 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.746.074ww	 3000K	warm white · 342 lm
32.746.074nw	 4000K	nature white · 351 lm
32.746.074cw	 6000K	cold white · 351 lm

DIMENSIONAL DRAWING



500 x 70 x 47 mm further lengths on request

CABINET LIGHTS

CABINET LIGHT ALH1

	WATTAGE 0.96 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 / 6000 Kelvin	

TECHNICAL DATA

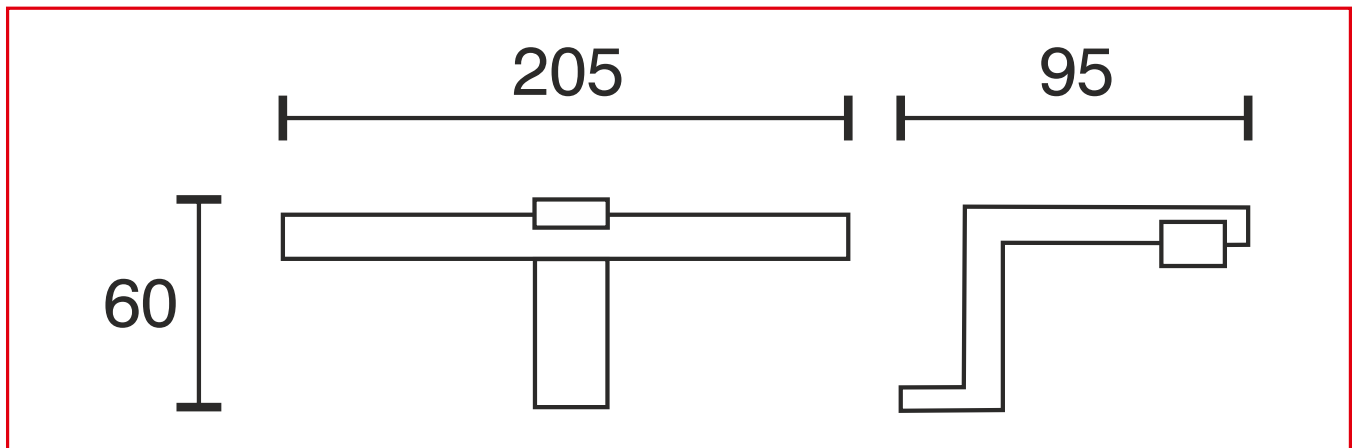
Input voltage	12 Volt DC
Wattage	0.96 Watt
Type	1800 mm mains lead with LED plug
Dimensions	205 x 95 x 60 mm
Housing colour	silver
Installation	screw mounting at the top side
Correlated colour temperature and luminous flux of the light source	3000K 72 Lumen 6000K 76 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.510.176ww	 3000K	warm white · 72 lm
32.510.176cw	 6000K	cold white · 76 lm

DIMENSIONAL DRAWING



205 x 95 x 60 mm

CABINET LIGHTS

CABINET LIGHT ALH2

	WATTAGE 1.68 Watt	INPUT VOLTAGE 12 Volt DC
	CORRELATED COLOUR TEMPERATURE 3000 / 6000 Kelvin	

TECHNICAL DATA

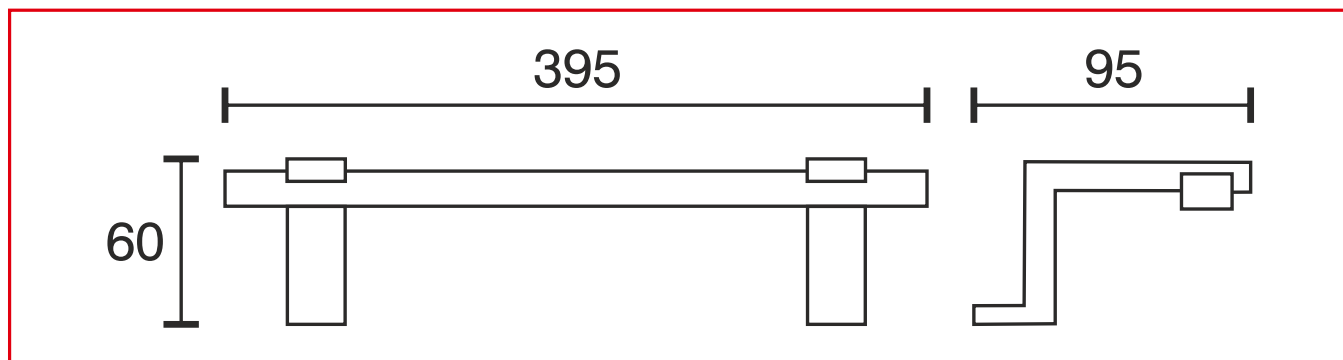
Input voltage	12 Volt DC
Wattage	1.68 Watt
Type	1800 mm mains lead with LED plug
Dimensions	395 x 95 x 60 mm
Housing colour	silver
Installation	screw mounting at the top side
Correlated colour temperature and luminous flux of the light source	3000K 126 Lumen 6000K 133 Lumen
Lumen maintenance factor	L70B50 >36000 h
CRI	90
EEC	G
Waste disposal	through suitable disposal site
Replaceability	the light source is not replaceable

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	LIGHT COLOUR	
32.510.276ww	 3000K	warm white · 126 lm
32.510.276cw	 6000K	cold white · 133 lm

DIMENSIONAL DRAWING

**395 x 95 x 60 mm**