

CONTROLS

TOUCH CONTROL

Product catalogue

The decision on how to control a light is an important matter. Our Touch Controllers can be used to switch or dim the lights when touching a surface. They are easy and intuitive to use.

CONTENTS

7 PRODUCTS

01	Recessed dimmer with CCT colour control	39.564.001
02	Surface mounted dimmer with CCT colour control	39.565.003
03	CCT Corner Switch	39.505.006
04	Corner dimmer	39.468.006
05	RF Touch Dimmer	39.418.000
06	Touch Switch	39.368.009
07	Touch Dimmer	39.441.000

COLOUR CONTROL

RECESSED DIMMER WITH CCT COLOUR CONTROL

	WATTAGE	INPUT VOLTAGE
	max. 36 Watt	12 Volt DC

TECHNICAL DATA


Input voltage	12 Volt DC
Wattage	max. 36 Watt
Type	2000 mm mains lead with LED plug 2000 mm lead with LED socket
Dimensions	Ø 60 x 30 mm
Built-in dimensions	Ø 56 x 11 mm
Housing colour	white, black
Remarks	installation on secondary side between transformer and light, function ON/OFF, dimming, 2-pole colour temperature control of the connected LED lights
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.564.001	☐ white
39.564.003	☒ black

DIMENSIONAL DRAWING

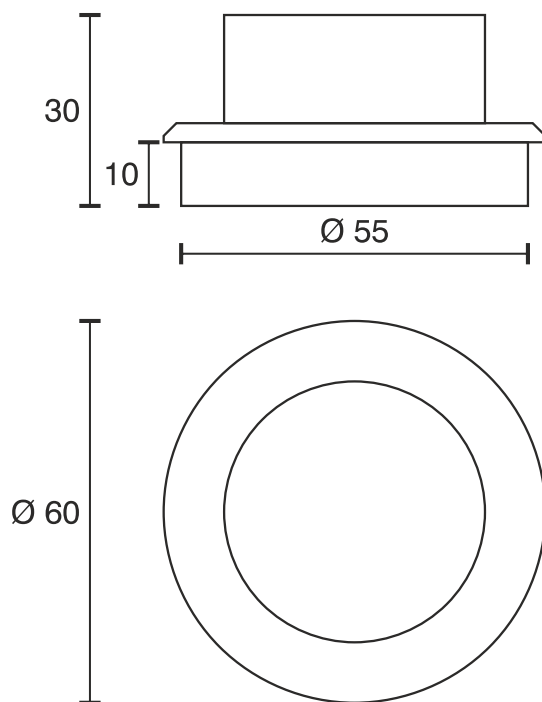

$\varnothing 60 \times 30 \text{ mm}$

COLOUR CONTROL

SURFACE MOUNTED DIMMER WITH CCT COLOUR CONTROL

	WATTAGE max. 36 Watt	INPUT VOLTAGE 12 Volt DC

TECHNICAL DATA


Input voltage	12 Volt DC
Wattage	max. 36 Watt
Type	2000 mm mains lead with LED plug 2000 mm lead with LED socket
Dimensions	Ø 60 x 27 mm
Housing colour	black, silver
Remarks	installation on secondary side between transformer and light, function ON/OFF, dimming, 2-pole colour temperature control of the connected LED lights
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.565.003	● black
39.565.006	● silver


DIMENSIONAL DRAWING

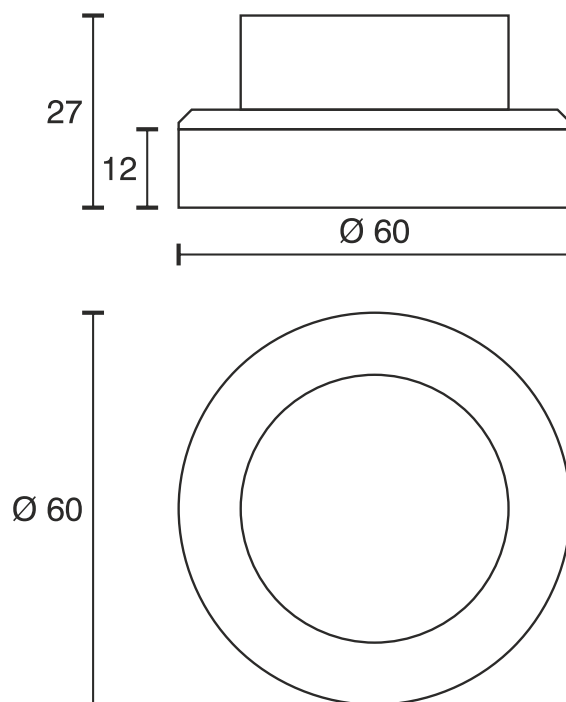

$\varnothing 60 \times 27$ mm

COLOUR CONTROL

CCT CORNER SWITCH

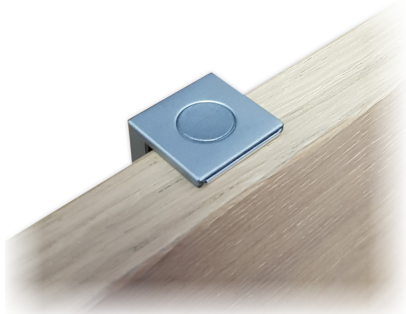	WATTAGE	INPUT VOLTAGE
	max. 36 Watt	12 Volt DC

TECHNICAL DATA


Input voltage	12 Volt DC
Wattage	max. 36 Watt
Type	2000 mm mains lead with LED plug 2000 mm lead with LED socket
Dimensions	56 x 23 x 23 mm
Housing colour	silver
Installation	installation with screws, with double adhesive tape
Remarks	installation on secondary side between transformer and light, for switching and colour temperature control of LED lights, installation for example at the bed head or at the side of a cabinet

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS


ORDER NO.	HOUSING COLOUR
39.505.006	 silver

DIMENSIONAL DRAWING

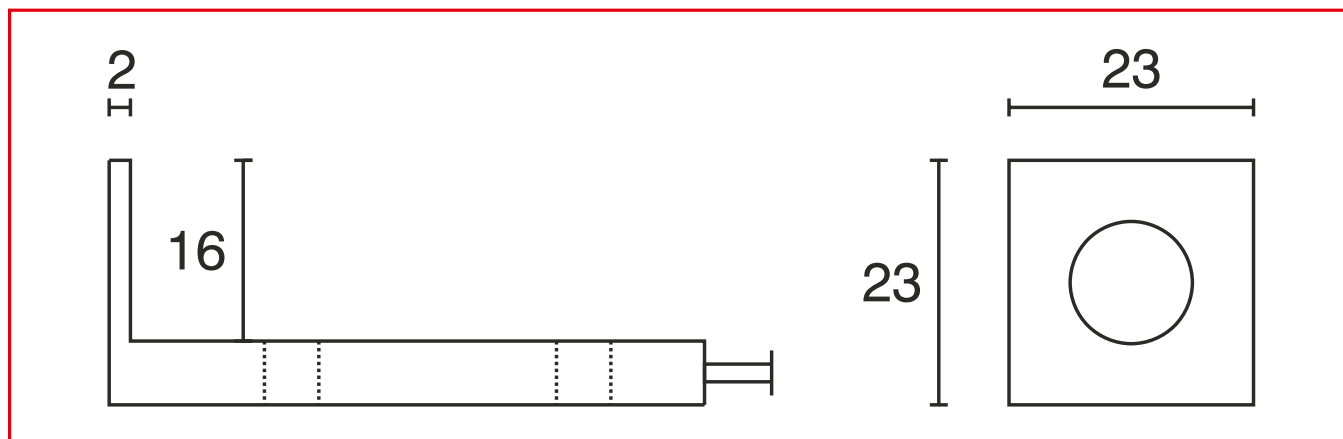**56 x 23 x 23 mm**

TOUCH CONTROL

CORNER DIMMER

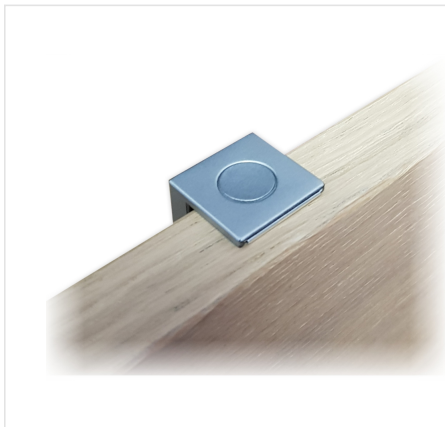

WATTAGE

max. 36 Watt

INPUT VOLTAGE

12 Volt DC

WATTAGE

max. 72 Watt

INPUT VOLTAGE

24 Volt DC

TECHNICAL DATA


Input voltage	12 / 24 Volt DC
Wattage	max. 36 Watt at 12 Volt DC max. 72 Watt at 24 Volt DC
Type	2000 mm mains lead with LED plug 2000 mm lead with LED socket
Dimensions	56 x 23 x 23 mm
Housing colour	silver
Installation	installation with screws, with double adhesive tape
Remarks	installation on secondary side between transformer and light, switching and dimming of LED lights, installation for example at the bed head or at the side of a cabinet

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.468.006	 silver

DIMENSIONAL DRAWING

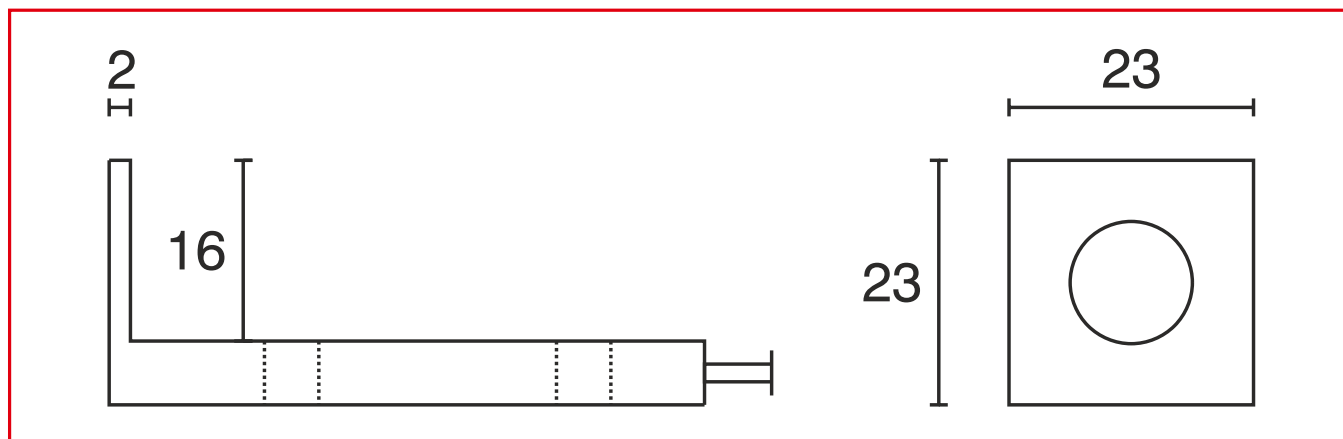**56 x 23 x 23 mm**

TOUCH CONTROL

RF TOUCH DIMMER



WATTAGE

max. 36 Watt

INPUT VOLTAGE

12 Volt DC

WATTAGE

max. 72 Watt

INPUT VOLTAGE

24 Volt DC

TECHNICAL DATA


Input voltage	5 - 24 Volt DC
Wattage	max. 36 Watt at 12 Volt DC max. 72 Watt at 24 Volt DC
Type	500 mm mains lead with LED plug 500 mm lead with LED socket 2000 mm sensor lead with ring terminal M4
Dimensions	99 x 47 x 12 mm
Housing colour	white
Installation	screw fixing
Radio range	max. 15 m in open area, might be reduced greatly by metal or walls
Remarks	installation on secondary side between transformer and light, wireless connection between two or more touch controllers, synchronous switching and dimming of the attached lights, setup of 4 separate control channels possible

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	FUNCTION
39.418.000	Dimmer

DIMENSIONAL DRAWING

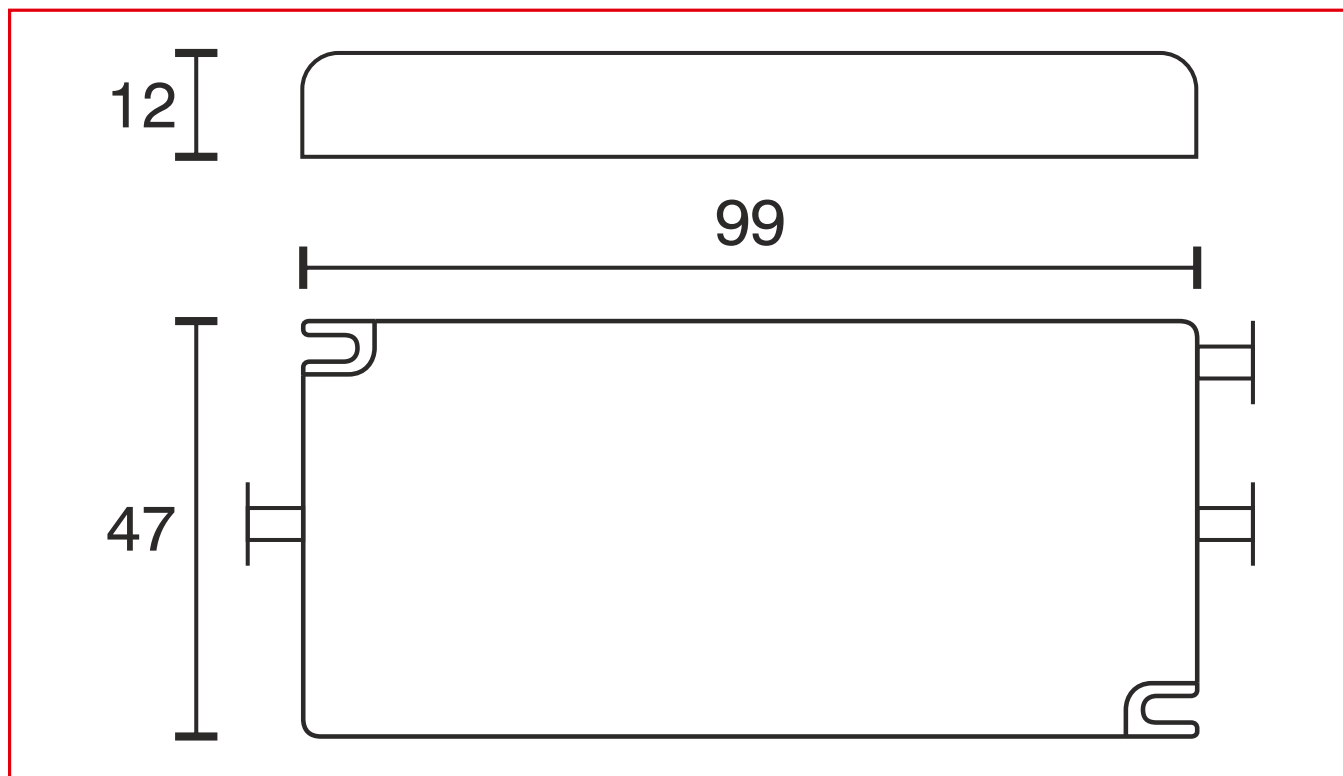

99 x 47 x 12 mm

TOUCH CONTROL

TOUCH SWITCH

	WATTAGE max. 36 Watt	INPUT VOLTAGE 12 Volt DC
	WATTAGE max. 72 Watt	INPUT VOLTAGE 24 Volt DC

TECHNICAL DATA


Input voltage	12 / 24 Volt DC
Wattage	max. 36 Watt at 12 Volt DC max. 72 Watt at 24 Volt DC
Type	2000 mm mains lead with LED plug 500 mm lead with LED socket 100 mm sensor lead with ring terminal M4
Dimensions	90 x Ø 10 mm
Remarks	installation on secondary side between transformer and light, for touch sensitive switching of LED lights, can be build into lights because of the compact construction

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	FUNCTION
39.368.009	Switch

DIMENSIONAL DRAWING

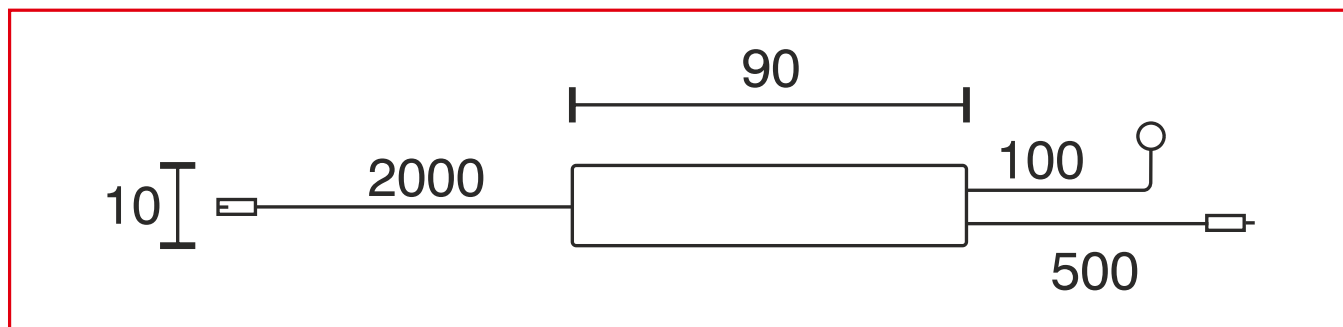

90 x Ø 10 mm

TOUCH CONTROL

TOUCH DIMMER

	WATTAGE max. 36 Watt	INPUT VOLTAGE 12 Volt DC
	WATTAGE max. 72 Watt	INPUT VOLTAGE 24 Volt DC

TECHNICAL DATA


Input voltage	12 - 24 Volt DC
Wattage	max. 36 Watt at 12 Volt DC max. 72 Watt at 24 Volt DC
Type	2000 mm mains lead with LED plug 500 mm lead with LED socket 300 mm sensor lead with ring terminal M4
Dimensions	90 x Ø 10 mm
Remarks	installation on secondary side between transformer and light, for touch sensitive switching and dimming of LED lights, can be build into lights because of the compact construction

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	FUNCTION
39.441.000	Dimmer

DIMENSIONAL DRAWING

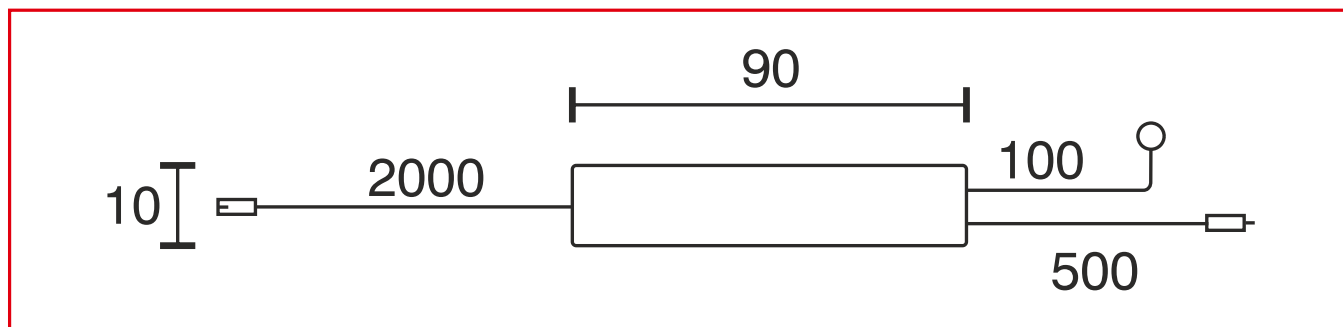

90 x Ø 10 mm