

TRANSFORMERS

TRANSFORMER 30 W

	INPUT VOLTAGE 230 Volt AC	OUTPUT VOLTAGE 12 Volt DC
	WATTAGE 30 Watt	

TECHNICAL DATA

Input voltage	230 Volt AC
Output voltage	12 Volt DC
Wattage	30 Watt
Type	2000 mm feeder cable with CEE plug 200 mm lead LED distributor 6 - fold
Dimensions	154 x 50 x 14 mm
Installation	screw fixing
Remarks	fuse with overload, excess temperature and short-circuit protection, for use in furniture
Intended for the following light source(s)	LED
Efficiency in full-load	86 %
No-load power	< 0.5 Watt
Dimmable	no
Weight	190 gram
Replaceability	by qualified persons
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

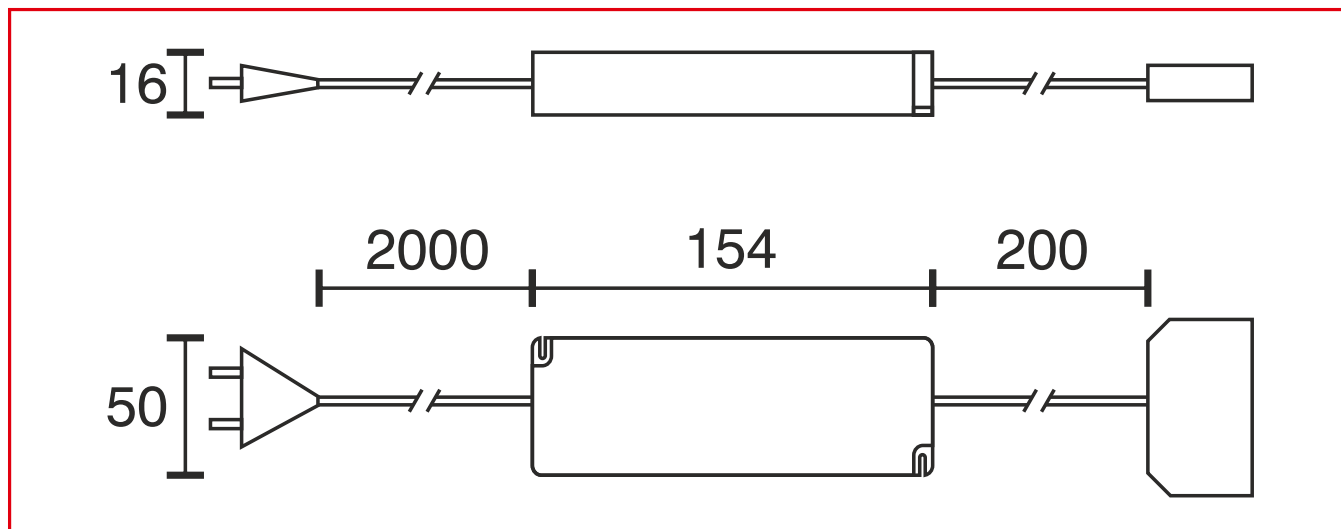
VARIANTS

ORDER NO.

WATTAGE

38.157.621**30 Watt**

DIMENSIONAL DRAWING

**154 x 50 x 14 mm**