

ACCESSORIES

MULTIMEDIA

Product catalogue

The ever-increasing quantity of Multimedia devices require suitable connection possibilities. Our products combine function and cable management. There are practical solutions for charging mobile devices using USB or wireless charging, as well as connection sockets to connect HiFi devices.

CONTENTS

14 PRODUCTS

01	Built-in charging socket	39.566.001
02	Built-in charging socket	39.567.003
03	Mounted USB charging socket	39.487.003
04	USB charging socket A+C	39.528.003
05	USB charging socket C+C 18+18W	39.543.003
06	USB charging socket C+C 45+20W	39.537.003
07	USB charging socket 2 x 2.4 A	39.490.003
08	USB charging socket 2 x 2.4 A	39.490.903
09	Wireless Charging Station	39.527.003
10	Wireless charger with USB A + C socket	39.552.003
11	USB Charging Socket 230 V	39.287.203
12	USB Charging Socket 12 V DC	39.325.103
13	HDMI Connection Socket	39.327.103
14	USB / Audio Connection Socket	39.326.103

MULTIMEDIA

BUILT-IN CHARGING SOCKET



INPUT VOLTAGE

24 Volt DC

TECHNICAL DATA


Input voltage	24 Volt DC
Output voltage	5 - 20 Volt DC
Charging current	USB-A1: 5 V/3 A, 9 V/3 A, 12 V/2.5 A, 20 V/1.5 A (max. 30 W) USB-A: 5 V/3 A, 9 V/2 A, 12 V/1.5 A (max. 18 W) USB-C: 5 V/3 A, 9 V/3 A, 12 V/2.5 A, 20 V/1.5 A (max. 30 W) combined max. 48 W
Dimensions	Ø 69 x 88.2 mm
Built-in dimensions	Ø 50 to 60 x 84 mm
Housing colour	white
Installation	with screw nut
Remarks	the central insert can be extended and retracted by pressing it, in order to access the USB charging sockets, power supply included
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.566.001	☐ white

DIMENSIONAL DRAWING

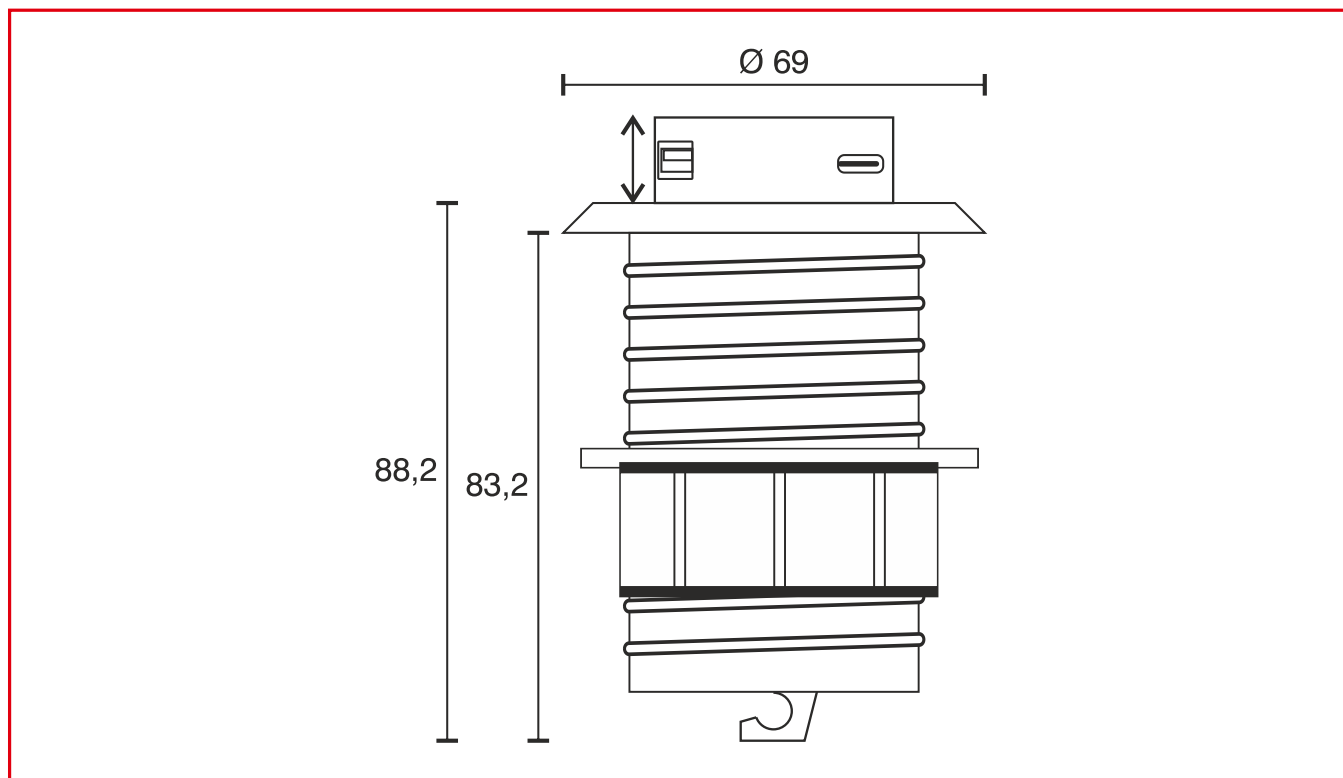

$\varnothing 69 \times 88.2 \text{ mm}$

MULTIMEDIA

BUILT-IN CHARGING SOCKET



INPUT VOLTAGE	
24 Volt DC	

TECHNICAL DATA


Input voltage	24 Volt DC
Output voltage	5 - 12 Volt DC
Charging current	USB-A: 5 V/3 A, 9 V/2 A, 12 V/1.5 A (max. 18 W) USB-C: 5 V/3 A, 9 V/2.22 A, 12 V/1.67 A (max. 20 W) wireless: 5 V/1 A, 7.5 V/1 A, 9 V/1.66 A (max. 15 W) combined max. 39 W
Dimensions	Ø 75 x 102.7 mm
Built-in dimensions	Ø 60 to 70 x 101 mm
Housing colour	black
Installation	with screw nut
Remarks	the central insert can be extended and retracted by pressing it, in order to access the USB charging sockets, power supply included
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.567.003	 black

DIMENSIONAL DRAWING

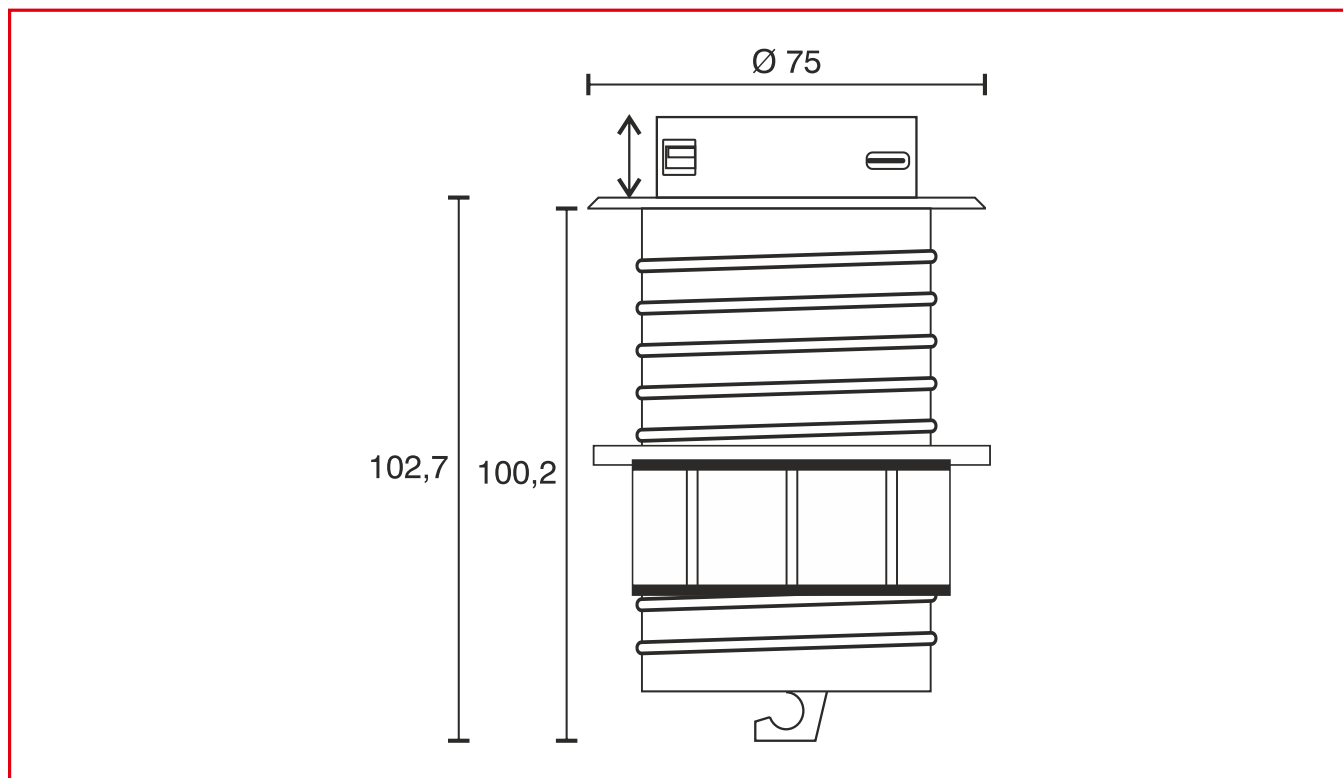

$\varnothing 75 \times 102.7 \text{ mm}$

MULTIMEDIA

MOUNTED USB CHARGING SOCKET

	INPUT VOLTAGE	CHARGING CURRENT
	12 / 24 Volt DC	max. 2.1 Ampere

TECHNICAL DATA


Input voltage	12 / 24 Volt DC
Output voltage	5 Volt DC
Drivers Wattage	min. 15 Watt at 12 Volt
Charging current	max. 2.1 Ampere
Type	2000 mm mains lead with LED plug
Dimensions	45 x 40 x 12 mm
Housing colour	anthracite
Installation	hidden screw fixing from the front site
Remarks	operation or charging of USB devices with type A plug, pay attention to the loading current of the attached device

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.487.003	 anthracite

DIMENSIONAL DRAWING

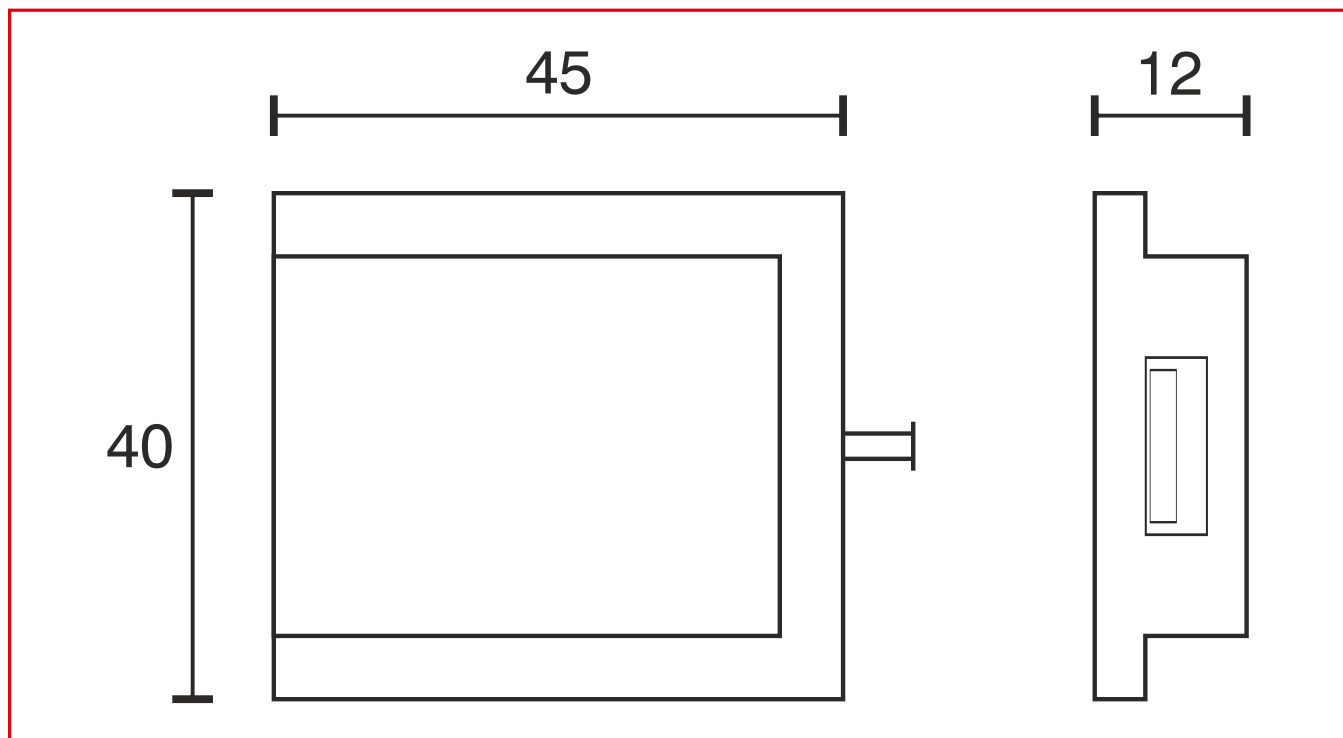**45 x 40 x 12 mm**

MULTIMEDIA

USB CHARGING SOCKET A+C

	INPUT VOLTAGE	CHARGING CURRENT
	12 / 24 Volt DC	max. 20 Watt

TECHNICAL DATA


Input voltage	12 / 24 Volt DC
Output voltage	5 - 10 Volt DC
Drivers Wattage	min. 25 Watt
Charging current	max. 20 Watt / 3 Ampere
Type	1800 mm mains lead with LED plug-in connection
Dimensions	Ø 37 x 30 mm
Built-in dimensions	Ø 25 x 30 mm
Housing colour	black
Installation	hidden screw fixing from the front site
Remarks	operation or charging of up to two USB devices with max. 2.4 A each, max. 3 A total, pay attention to the loading current of the attached devices

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.528.003	 black

DIMENSIONAL DRAWING

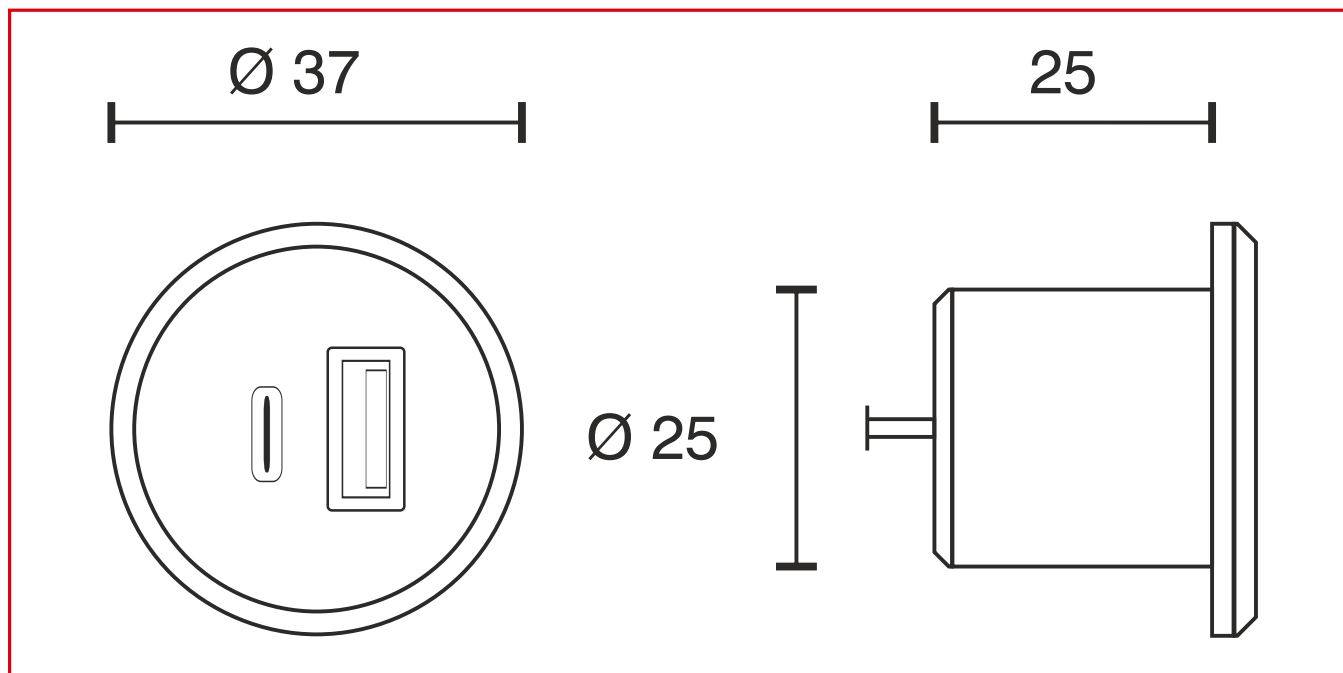

$\varnothing 37 \times 30$ mm

MULTIMEDIA

USB CHARGING SOCKET C+C 18+18W



INPUT VOLTAGE

10 - 24 Volt DC

CHARGING CURRENT

2 x 18 Watt

TECHNICAL DATA


Input voltage	10 - 24 Volt DC
Output voltage	5 Volt DC
Drivers Wattage	min. 45 Watt
Charging current	2 x 18 Watt
Type	1500 mm mains lead with tinned ends
Dimensions	55.5 x 55.5 x 40 mm
Built-in dimensions	Ø 46 x 32 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	operation or charging of up to two USB devices with max. 2 x 18 Watt matching Berker Integro products, delivery without cover frame

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.543.003	 anthracite

DIMENSIONAL DRAWING

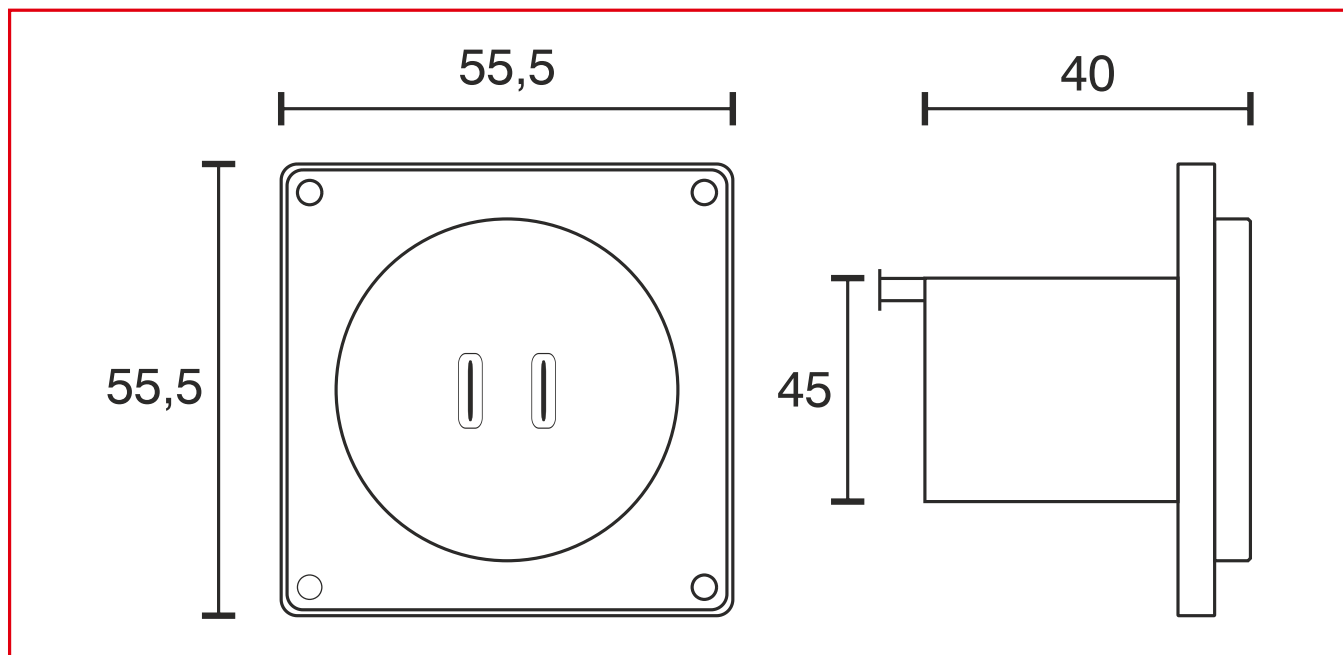**55.5 x 55.5 x 40 mm**

MULTIMEDIA

USB CHARGING SOCKET C+C 45+20W



INPUT VOLTAGE

10 - 30 Volt DC

CHARGING CURRENT

45 + 25 Watt

TECHNICAL DATA


Input voltage	10 - 30 Volt DC
Output voltage	5 Volt DC
Drivers Wattage	min. 75 Watt
Charging current	45 Watt + 25 Watt
Type	150 mm mains lead with tinned ends
Dimensions	55.5 x 55.5 x 40 mm
Built-in dimensions	Ø 46 x 32 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	operation or charging of up to two USB devices with max. 45 + 25 Watt matching Berker Integro products, delivery without cover frame

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS


ORDER NO.	HOUSING COLOUR
39.537.003	 anthracite

DIMENSIONAL DRAWING

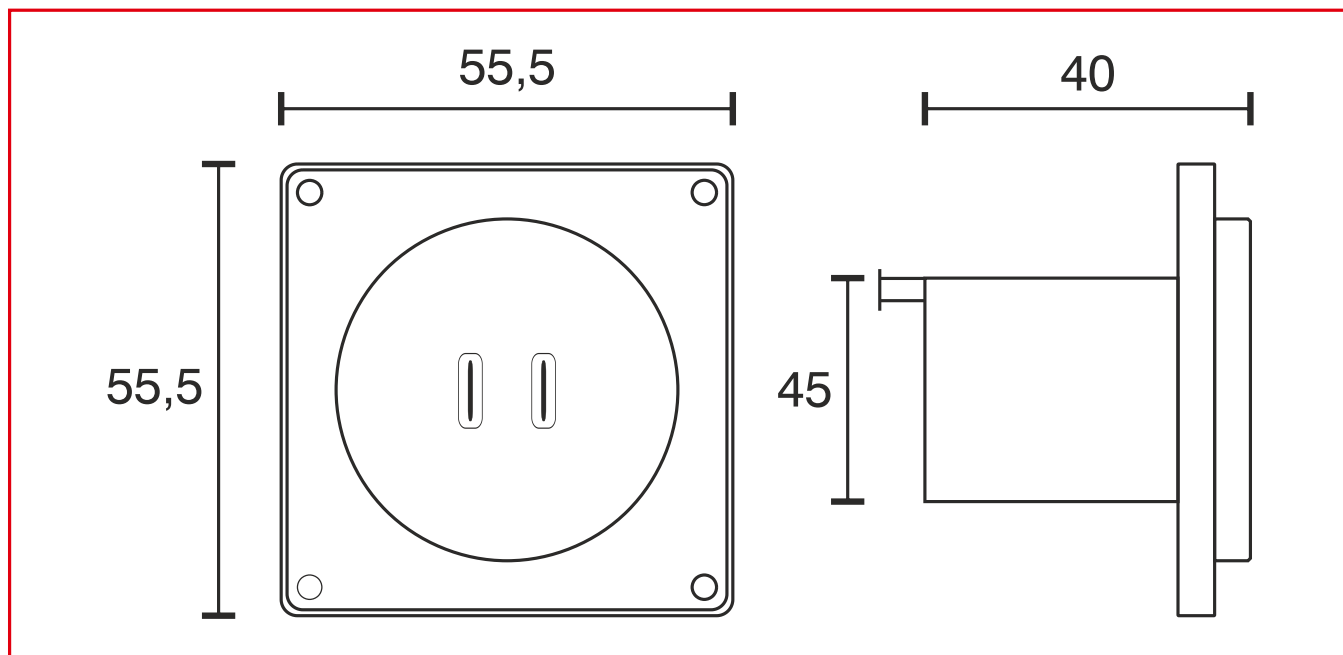**55.5 x 55.5 x 40 mm**

MULTIMEDIA

USB CHARGING SOCKET 2 X 2.4 A

	INPUT VOLTAGE	CHARGING CURRENT
	10 - 15 Volt DC	max. 2 x 2.4 Ampere

TECHNICAL DATA


Input voltage	10 - 15 Volt DC
Output voltage	5 Volt DC
Drivers Wattage	min. 25 Watt
Charging current	max. 2 x 2.4 Ampere
Type	1500 mm mains lead with tinned ends
Dimensions	Ø 36 x 41 mm
Built-in dimensions	Ø 30 x 38 mm
Housing colour	black
Installation	with screw nut
Remarks	for 6 - 21 mm material thickness, operation or charging of up to two USB devices with max. 2.4 A each, pay attention to the loading current of the attached devices

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.490.003	 black

DIMENSIONAL DRAWING

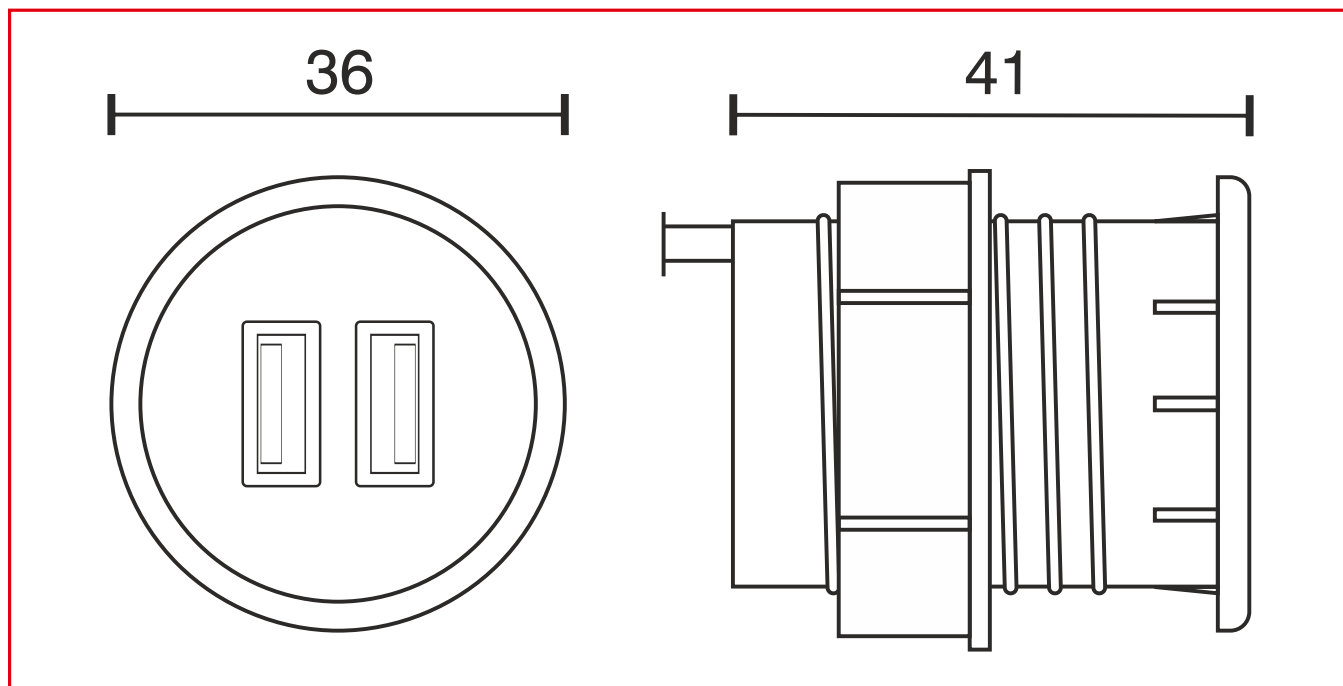

Ø 36 x 41 mm

MULTIMEDIA

USB CHARGING SOCKET 2 X 2.4 A



INPUT VOLTAGE

10 - 15 Volt DC

CHARGING CURRENT

max. 2 x 2.4 Ampere

TECHNICAL DATA

Input voltage	10 - 15 Volt DC
Output voltage	5 Volt DC
Drivers Wattage	min. 25 Watt
Charging current	max. 2 x 2.4 Ampere
Type	1500 mm mains lead with tinned ends
Dimensions	55.5 x 55.5 x 40 mm
Built-in dimensions	Ø 46 x 32 mm
Housing colour	black
Installation	screw fixing
Remarks	operation or charging of up to two USB devices with max. 2.4 A each, pay attention to the loading current of the attached devices, matching Berker Integro products

Subject to technical modifications. Special lengths and customized versions are available upon request.


VARIANTS

ORDER NO.

HOUSING COLOUR

39.490.903 **black**

DIMENSIONAL DRAWING

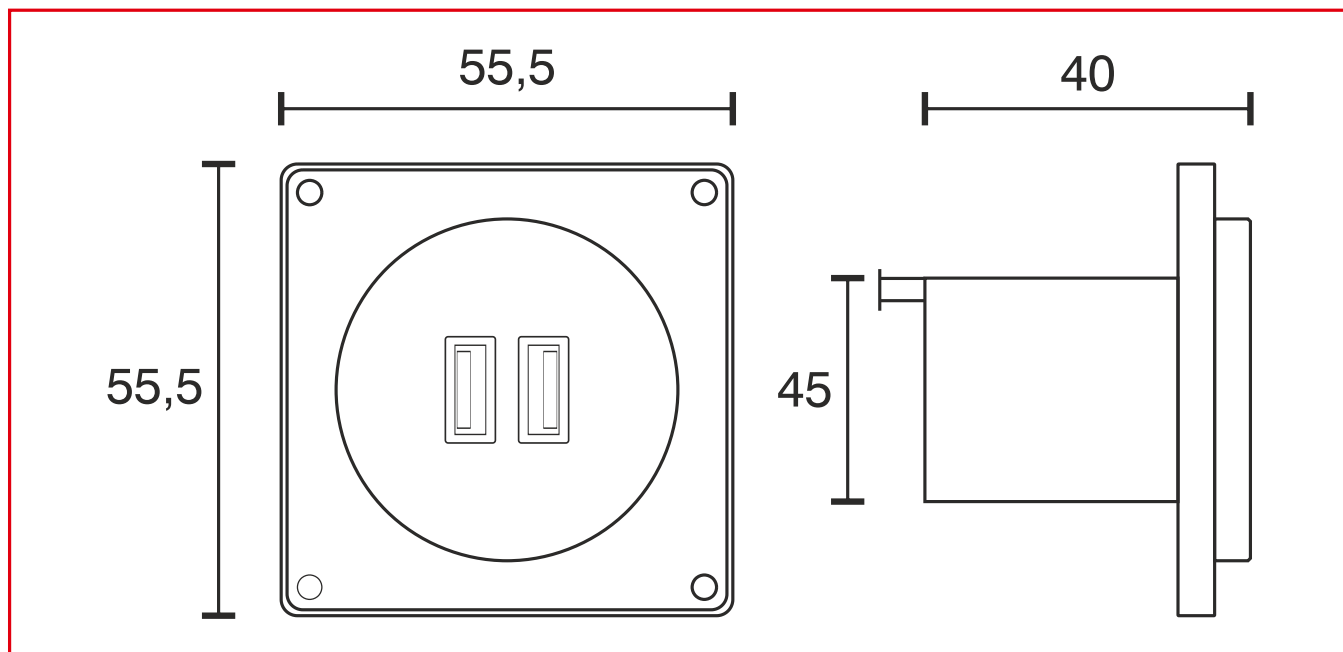**55.5 x 55.5 x 40 mm**

MULTIMEDIA

WIRELESS CHARGING STATION

	INPUT VOLTAGE	CHARGING POWER
	5 - 12 Volt DC	5 - 10 Watt

TECHNICAL DATA


Input voltage	5 - 12 Volt DC
Output voltage	5 Volt DC
Charging power	5 - 10 Watt
Charging distance	approx. 1 - 25 mm
Type	1200 mm mains lead with USB plug type A
Dimensions	Ø 80 x 13 mm
Housing colour	black
Installation	screw fixing
Remarks	charging station with Qi standard, invisible charging through non metallic materials, power supply not included

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.527.003	 black

DIMENSIONAL DRAWING

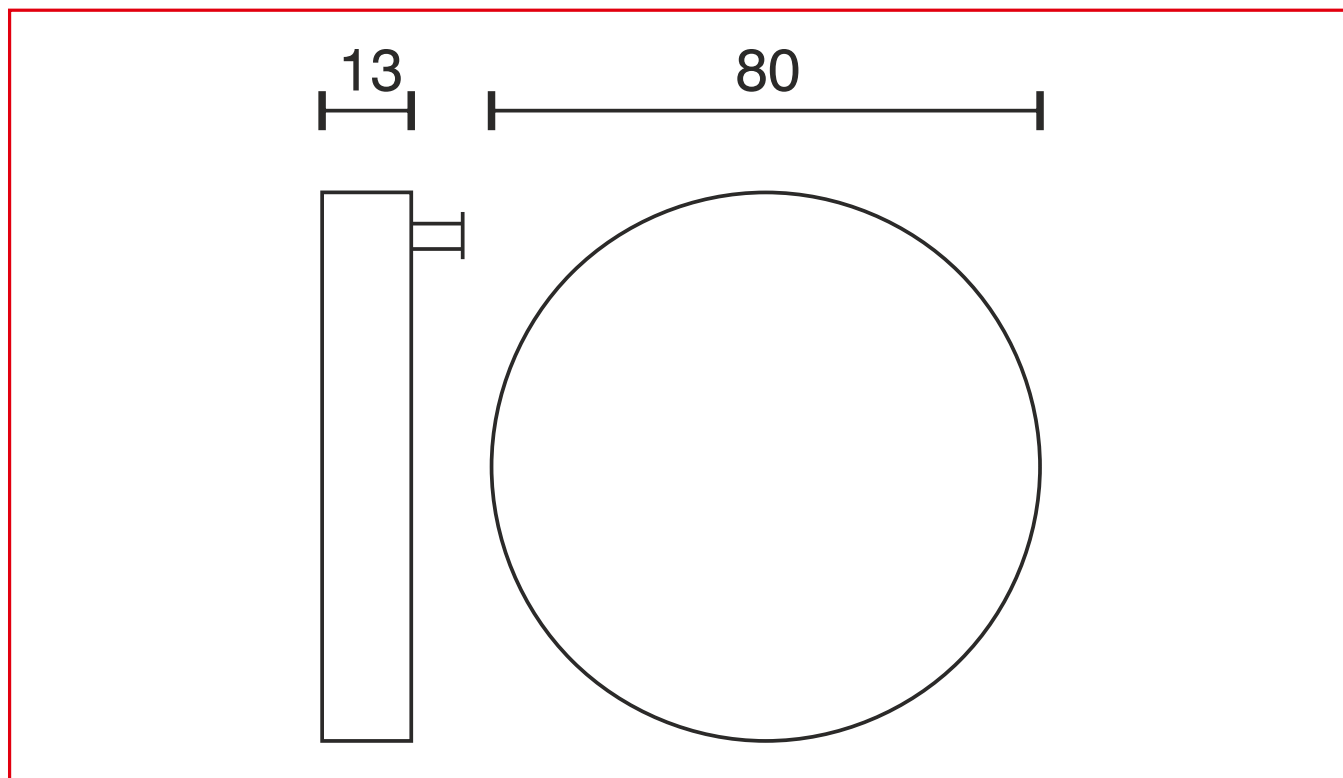

Ø 80 x 13 mm

MULTIMEDIA

WIRELESS CHARGER WITH USB A + C SOCKET

	INPUT VOLTAGE	
	5 - 12 Volt DC	

TECHNICAL DATA


Input voltage	5 - 12 Volt DC
Output voltage	5 - 12 Volt DC
Charging current	USB-A socket 5 V / 2 A, 9 V / 2 A, 12 V / 1,5 A USB-C socket 5 V / 2 A, 9 V / 2 A, 12 V / 1,5 A wireless max. 15 Watt
Efficiency	> 70 %
Charging distance	max. 5 mm
Type	1200 mm mains lead with USB plug type A
Dimensions	Ø 60 x 24 mm
Built-in dimensions	Ø 55 x 20 mm
Housing colour	black
Installation	snap-in
Remarks	charging station with Qi standard, usable as wireless charging station or with USB-A / USB-C connection, turnable cover, power supply not included
Waste disposal	through suitable disposal site

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.552.003	 black

DIMENSIONAL DRAWING

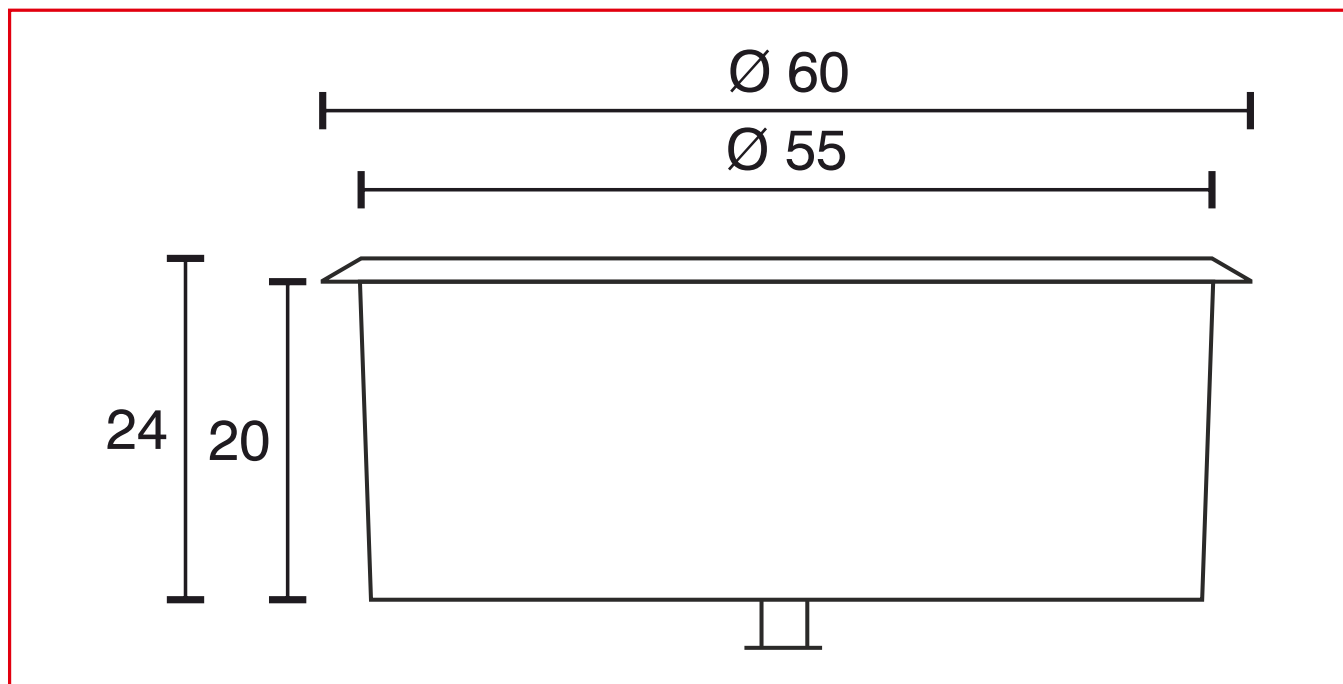

$\varnothing 60 \times 24 \text{ mm}$

MULTIMEDIA

USB CHARGING SOCKET 230 V

	INPUT VOLTAGE	CHARGING CURRENT
	230 Volt AC	max. 3 Ampere

TECHNICAL DATA


Input voltage	230 Volt AC
Output voltage	5 Volt DC
Charging current	max. 3 Ampere
Type	2000 mm feeder cable with CEE plug
Dimensions	60 x 60 x 47 mm
Built-in dimensions	Ø 46 x 38 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	can be combined with other Berker Integro switch and socket elements, not suitable for data transfer, operation or charging of up to two USB devices with max. 3 A total

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.287.203	 anthracite

DIMENSIONAL DRAWING

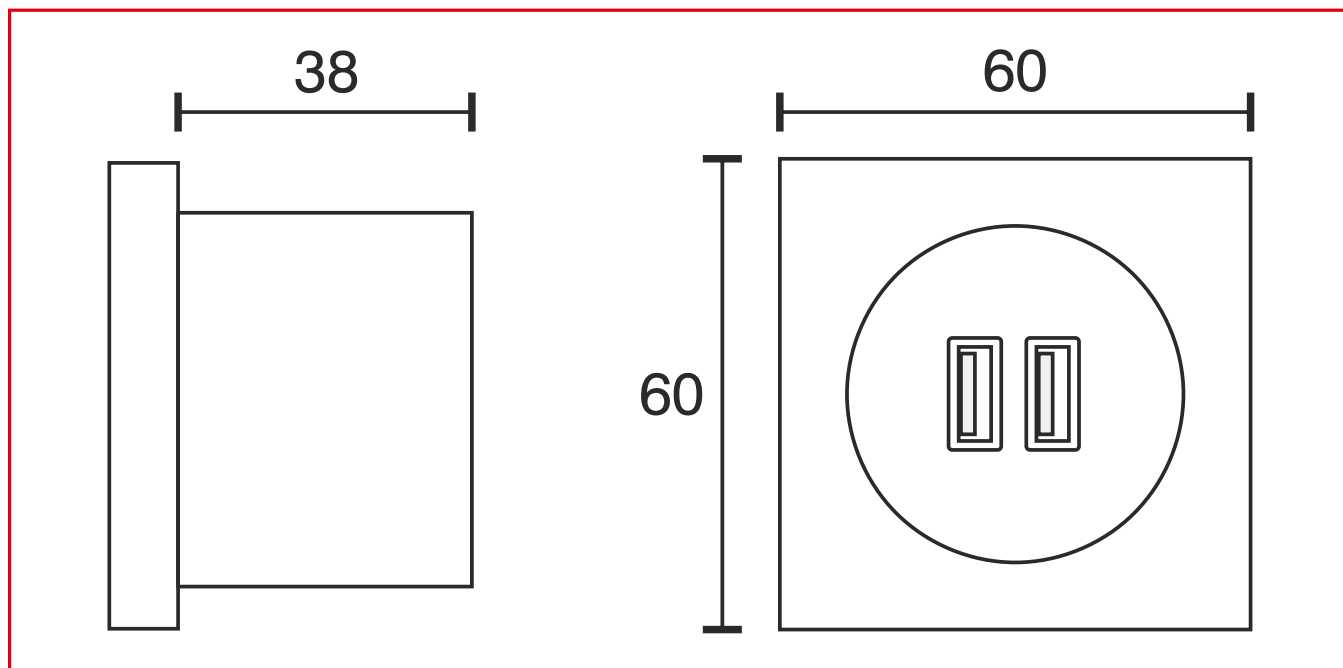**60 x 60 x 47 mm**

MULTIMEDIA

USB CHARGING SOCKET 12 V DC

	INPUT VOLTAGE	CHARGING CURRENT
	12 Volt DC	max. 3 Ampere

TECHNICAL DATA


Input voltage	12 Volt DC
Output voltage	5 Volt DC
Charging current	max. 3 Ampere
Type	2000 mm mains lead with LED plug
Dimensions	60 x 60 x 45 mm
Built-in dimensions	Ø 46 x 36 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	can be combined with other Berker Integro switch and socket elements, not suitable for data transfer, suitable for connection with a 12 V DC LED transformer

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.325.103	 anthracite

DIMENSIONAL DRAWING

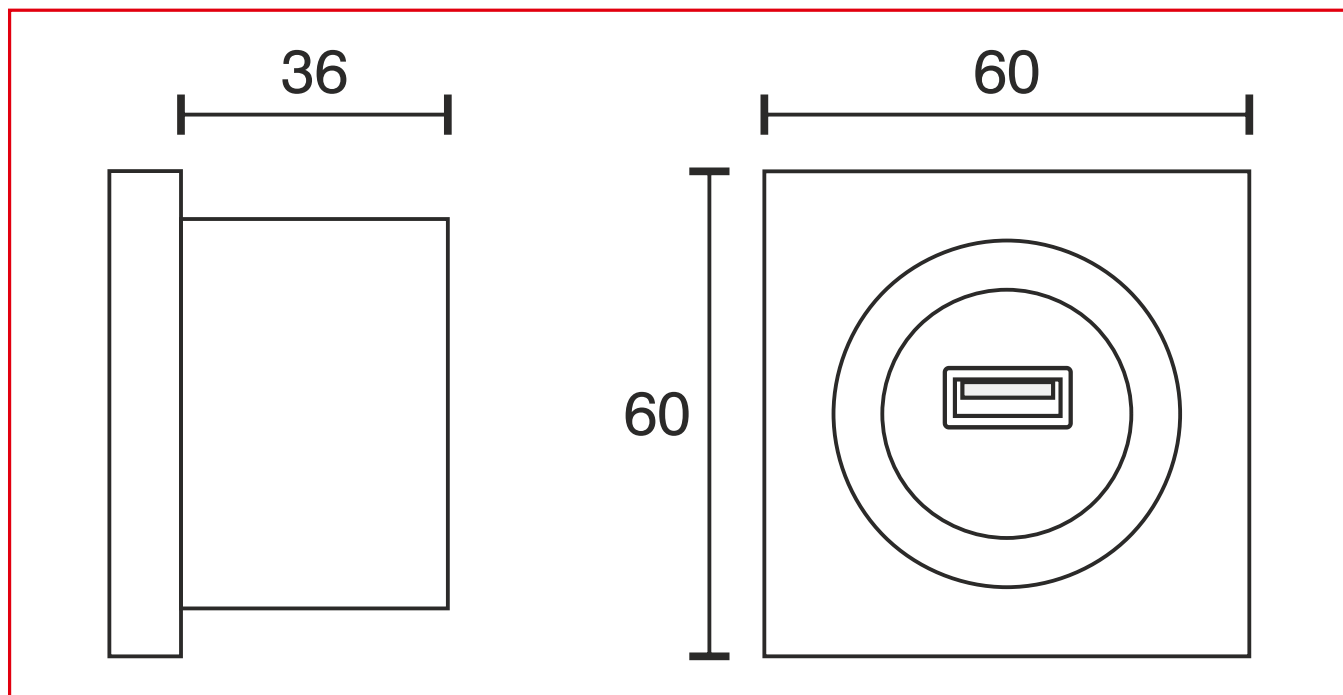**60 x 60 x 45 mm**

MULTIMEDIA

HDMI CONNECTION SOCKET



TECHNICAL DATA


Type	1 x HDMI Connection Socket
Dimensions	60 x 60 x 9 mm
Built-in dimensions	Ø 46 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	can be combined with other Berker Integro switch and socket elements, for improvement and optimization of cable management, suitable for data transfer, for example for TV- and Hifi-furniture

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.327.103	 anthracite

DIMENSIONAL DRAWING

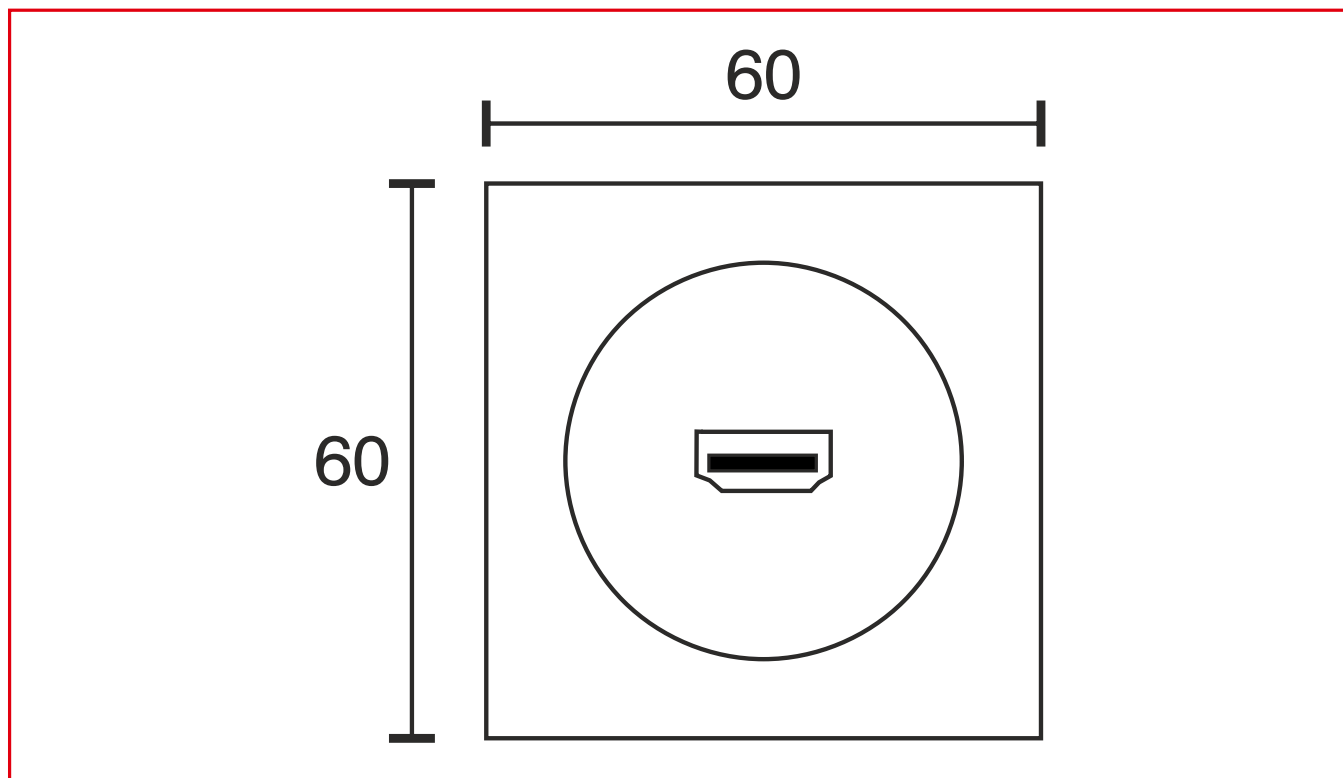

60 x 60 x 9 mm

MULTIMEDIA

USB / AUDIO CONNECTION SOCKET



TECHNICAL DATA


Type	1 x USB Connection Socket 1 x 3.5 mm Audio Connection Socket
Dimensions	60 x 60 x 9 mm
Built-in dimensions	Ø 46 mm
Housing colour	anthracite
Installation	screw fixing
Remarks	can be combined with other Berker Integro switch and socket elements, for improvement and optimization of cable management, suitable for data transfer, for example for TV- and Hifi-furniture

Subject to technical modifications. Special lengths and customized versions are available upon request.

VARIANTS

ORDER NO.	HOUSING COLOUR
39.326.103	 anthracite

DIMENSIONAL DRAWING

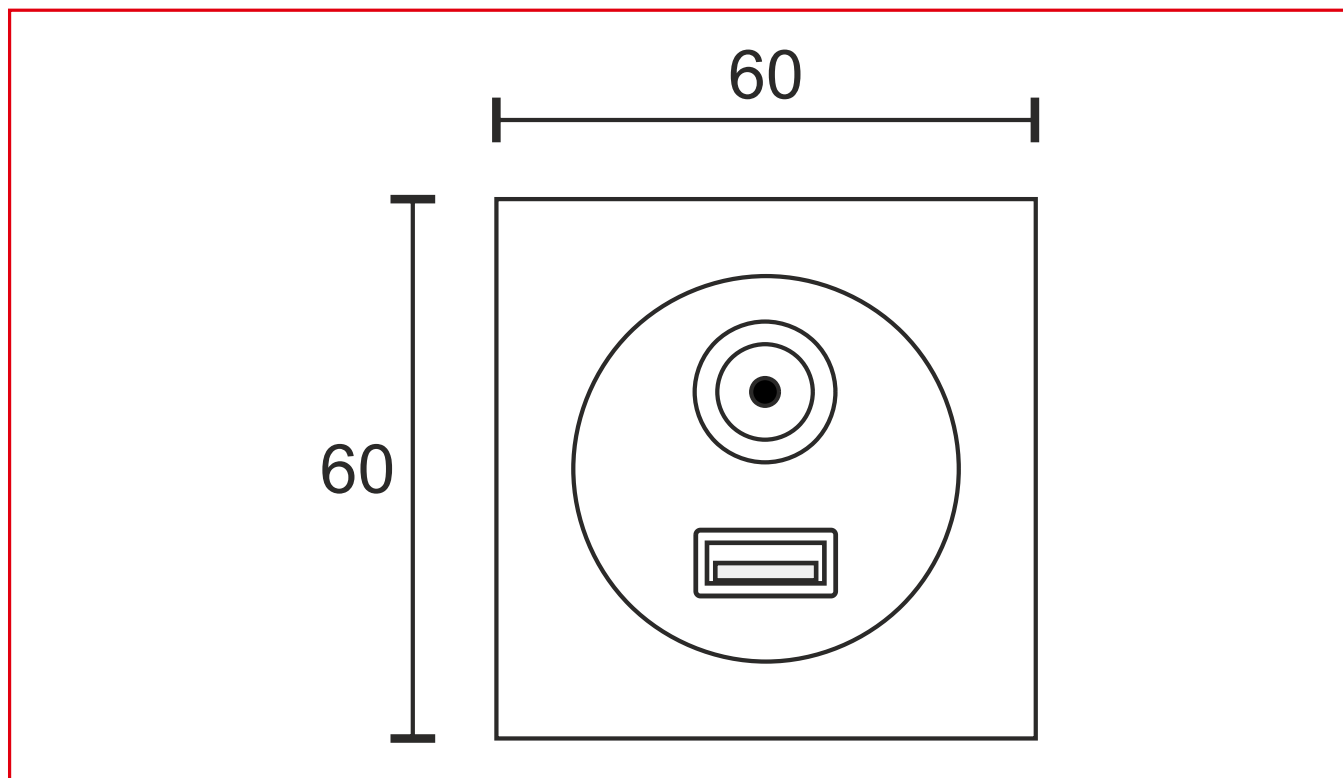

60 x 60 x 9 mm